

Mounting
M4 x 5mm depth

Plug

310mm

35

Guppy PSU



Mounting : Method A

Use M4 bolts for Side Mounting



Mounting : Method B

- i) Remove Plug.
- ii) Insert M5 Nuts in slide.
- iii) Reverse mount using M5 Bolts



Clear Lens
P-Filter
Diffuser

Leds


Input Voltage : + 24Vdc
Input Current : 1A , 0.75A
SMPS : 24V , 3A Min
Stroke : 5V ~24V Standard, 1V ~5V Opt
Colors : White, Red, Blue, Green, IR, UV

Diffuser : Medium (Std), Low, High
P-Filter : Option Available
 Additional diffusers, filters may be used by top mounting.
Reccomended SMPS : 24V DC , 5Amp

For Continuous operation please use low current option or contact us.

■ Connection Details

M8/M12 Connector/ Cable Breakout

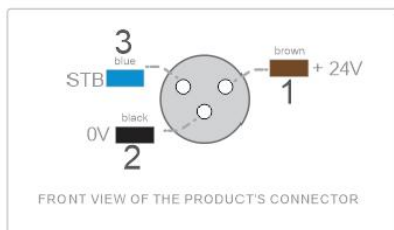

CONTINUOUS MODE CONNECTION



⚠ 1000 mA MAX

This product has to be plugged to a DC Power Supply capable of supplying atleast 1Amp Peak.

Nomenclature :

- x = W White
R Red (670nm)
B Blue
G Green
UV
IR Infra Red (850nm)
- yy = DP Diffuser Polariser
D Diffuser
- zz - 2A 2Amps
1A5 1.5Amps
1A 1Amp
0A7 0.75Amps



Document Type : Product	Title : Comet-310-x-yy-zz		
	Drawing Number : Prod, Comet-410		
	Rev. No. : ----	Date of Issue : 06-05-2021	Sheet : 1/1