



4x M4x0.7 Mounting Holes  
on 140mm PCD

**Input Voltage :** + 24Vdc  
**Input Current :** 1A , 0.75A  
**SMPS :** 24V , 3A Min  
**Strobe :** 5V ~24V Standard, 1V ~5V Opt  
**Colors :** White, Red, Blue, Green, UV, IR  
**Diffuser :** Medium (Std), Low, High  
**P-Filter :** Option Available  
 Additional diffusers, filters may be used by top mounting.  
**Recommended SMPS :** 24V DC , 5Amp

*For Continuous operation please use low current option or contact us.*


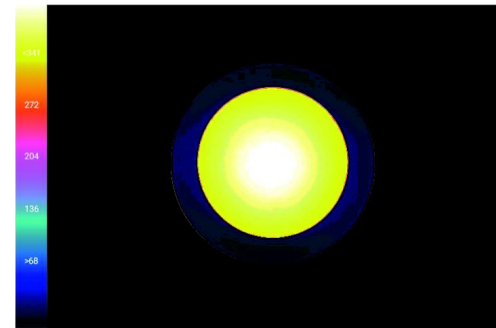


Light Distribution

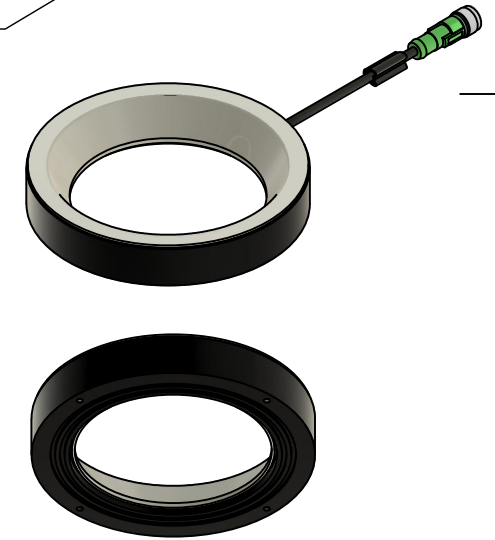

**Connection Details**

M8/M12 Connector/ Cable Breakout



**1000 mA MAX**  
 This product has to be plugged to a DC Power Supply capable of supplying; atleast 1Amp Peak.

|                                   |  |                                      |                       |
|-----------------------------------|--|--------------------------------------|-----------------------|
| Document Type :<br><b>Product</b> | Title :<br><b>Saturn-150110-LA30-x</b>                     |                                      |                       |
|                                   | Drawing Number :<br><b>Prod, Saturn-150110-LA30-x-2104</b> |                                      |                       |
|                                   | Rev. No. :<br><b>1.0</b>                                   | Date of Issue :<br><b>04-05-2021</b> | Sheet :<br><b>1/1</b> |