

Input Voltage: + 24Vdc Input Current: 1A, 0.75A SMPS: 24V , 3A Min


5V ~24V Standard, 1V ~5V Opt Strobe: White, Red, Blue, Green, IR, UV Colors :

Diffuer: Medium (Std), Low, High

P-Filter: Option Available

Additional diffuers, filters may be used by top mounting. **Reccomended SMPS**: 24V DC, 5Amp

For Continuous operation please use low current option or contact us.

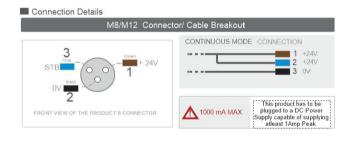



Dept.	Technical reference	Created by		Approved by		
		P.Merchant	30-04-2021			
		Document type		Document status		
		Product		Production		
		Title		DWG No.		
еье	CTCONICS	Saturn-9530-W-DP		PEPL-9530-2207		
Excel	lence reborn			Rev.	Date of issue	Sheet
				2	April, 2021	1/1